

# Low Watt Loss Ballast for Fluorescent Lamp

## บัลลาสต์ประหยัดไฟสำหรับหลอดฟลูออเรสเซนต์





**Product Description:** This is the magnetic ballast for using with fluorescent lamps.

**Feature:**

- Up to 40% saving of energy consumption for fluorescent lamp
- Each ballast produced from high quality silicon steels and special copper wire, which can bear up to 200 Degree Celsius
- Double Long lifetime usage
- Design for heavy usage continuously
- Specially designed for installation in high building and/or huge construction
- Designed for easy installation at customer's convenience
- Five years guarantee from our company

บัลลาสต์ประหยัดไฟ GATA สำหรับหลอดฟลูออเรสเซนต์ถูกออกแบบและผลิตจากซิลิคอนชนิดพิเศษ ทำให้บัลลาสต์ GATA สามารถลดการสูญเสียพลังงานในบัลลาสต์ได้ถึง 40% และอุณหภูมิขณะใช้งานต่ำ ทำให้อายุการใช้งานยาวนานขึ้นกว่า 2 เท่า จึงเหมาะสำหรับการใช้งานในตึกสูง และตามถนนหนทางที่ต้องเปิดไฟอย่างต่อเนื่องทุกวัน

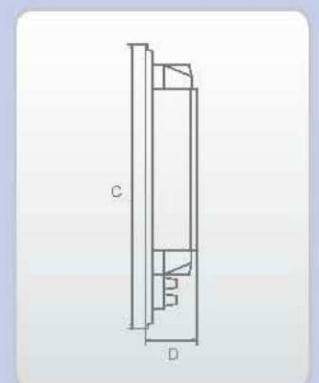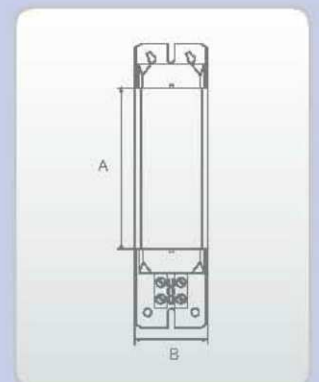

Item Description Ballast	Lamp			P.F.C. Cap. (µF)	Supply (Volt/Hz)	Dimension (mm)				Weight (kg)	PF	Certification
	Watt (W)	Current (A)	Volt (V)			A	B	C	D			
20LL	20	0.37	57	4.50	220/50	88	41.5	155	29	0.77	0.30	TIS 1955-2542 TIS 23-2521 Acc. To IEC 60920 IEC 60921
32LL	32	0.45	81	4.75	220/50	88	41.5	155	29	0.77	0.43	
40LL	40	0.43	103	4.75	220/50	88	41.5	155	29	0.77	0.45	