


# GU6.5 Lampholders

## For single-ended discharge lamps

Additional lead lengths and types on request


GU6.5 lampholders  
 Casing: ceramic, cover plate: PPS  
 Nominal rating: 2 A/250 V/5 kV pulse rating  
 Leads: Cu nickel-plated, stranded conductors 18 AWG,  
 PTFE-insulation, length: 305 mm (12")  
 Weight: 20 g, unit: 100 pcs.  
 Type: 34515 fixing holes for screws M3 (#4)  
**Ref. No.: 534218**  
 Type: 34516 threaded bushes for screws M3 (#4)  
**Ref. No.: 534219**

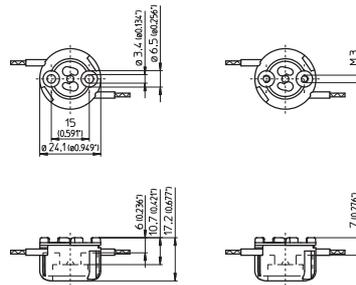

# GX10 Lampholders

## For single-ended discharge lamps

GX10 lampholder  
 Casing: steatite, cover plate: PPS  
 Nominal rating: 2/500/5 kV  
 Leads: Cu nickel-plated, stranded conductors  
 18AWG, PTFE insulation, length: 305 mm (12")  
 Weight: 25 g, unit: 100 pcs.  
 Type: 31550  
**Ref. No.: 543153**



# G12 Lampholders

## For single-ended discharge lamps

Additional lead lengths and types on request

G12 lampholders  
 Casing: ceramic, cover plate: PPS, black  
 Nominal rating: 660 W/600 V/5 kV pulse rating  
 Contacts: Ni  
 Leads: 18 AWG, SF-2  
 Fixing holes for screws M4 (#8)  
 Weight: 56/72/144 g, unit: 25 pcs.  
 Type: 31936  
**Ref. No.: 108257** lead length: 460 mm (18")  
**Ref. No.: 525750** lead length: 762 mm (30")  
**Ref. No.: 526211** lead length: 1525 mm (60")

