

LMDL - 53



Halogen Downlight

Applications

- A recessed downlight with fixed lamp position, Lumitron's LMDL-53, is suitable for low voltage halogen MR16. Ideal for commercial lighting applications, exhibition halls, exclusive residential projects, decorative applications hotels, shopping, arcades, condominiums, department stores, discount stores, and etc.

Specifications

- Trim: die-cast aluminium with polyester powder coating white finish.
- Suitable for 12V MR16 20W up to 50W.
- Polyester powder-coating in: (add suffixes to Lumitron Ref.)
 - -WH: White color
 - -BK: Black color
 - -SL: Silver color
- Lampholder: GX5.3, ceramic type.
- Transformer: magnetic or electronic transformer .
- Mounting: recessed mounting by supporting clips and fasteners.
- Diameter 79mm, cut-out 72mm.

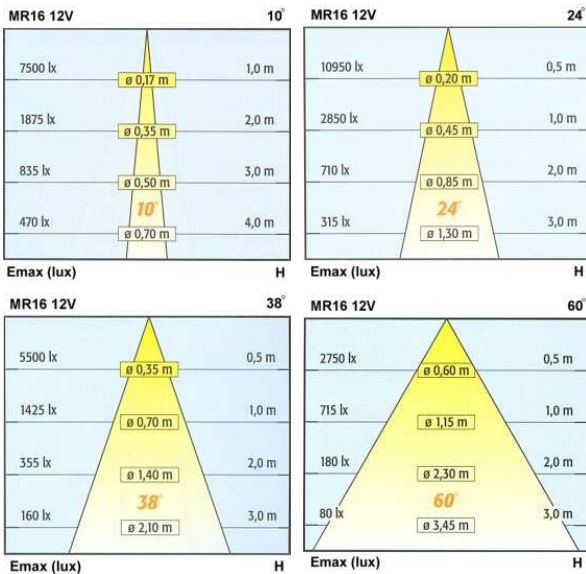

LUMITRON REF.	Lamp	Beam Angle	Color Temp	Base
LMDL-53-20MR16	MR16 20W	10°-40°	3,000K	Gx5.3
LMDL-53-35MR16	MR16 35W	10°-40°	3,000K	Gx5.3
LMDL-53-50MR16	MR16 50W	10°-40°	3,000K	Gx5.3