

# LMDL - 40

## Halogen Downlight

### Applications


- A recessed downlight with fixed lamp position, Lumitron's LMDL-40, is suitable for low voltage halogen MR16. Ideal for commercial lighting applications, exhibition halls, exclusive residential projects, decorative applications, shopping arcades, hotels, condominiums, and etc.

### Specifications

- Trim: die-cast aluminium.
- Reflector: heat resistant, high quality anodized aluminium reflector.
- Suitable for 12V MR16 20W up to 50W
- Polyester powder-coating in: (add suffixes to Catalog No.)
  - W: White color
  - B: Black color
  - S: Silver color
  - G: Gold color
- Lampholders: GX5.3 ceramic type.
- Transformer: magnetic or electronic transformer .
- Mounting: recessed mounting by supporting clips and fasteners.
- Diameter 89mm, cut-out 80mm.




LUMITRON



### Accessories (add suffixes to Lumitron Ref.)

- CF: Color filters
- BC: Black Cubicle

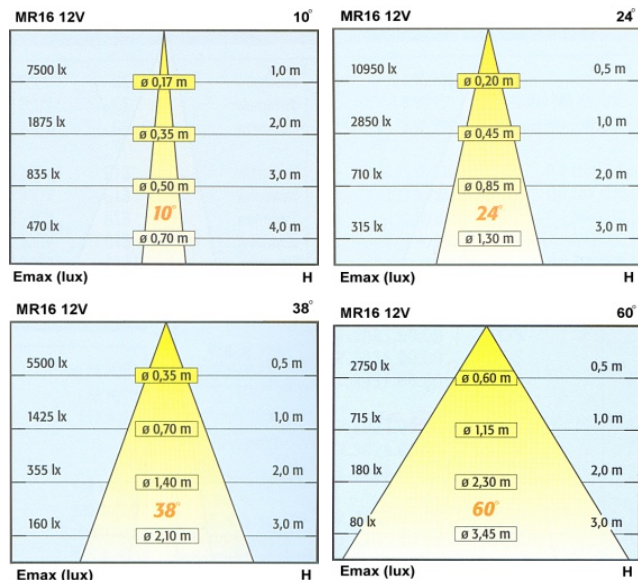

LUMITRON REF.	Lamp	Beam Angle	Color Temp	Base
LMDL-40-20MR16	MR16 20W	10°-40°	3,000K	Gx5.3
LMDL-40-35MR16	MR16 35W	10°-40°	3,000K	Gx5.3
LMDL-40-50MR16	MR16 50W	10°-40°	3,000K	Gx5.3