



## DIMENSIONS



## MOUNTING DIMENSIONS

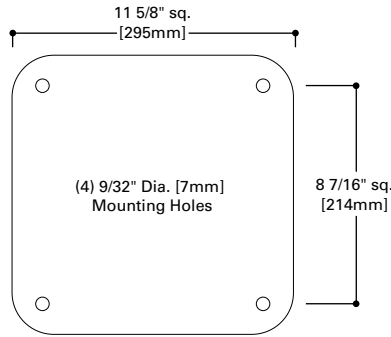

## DESCRIPTION

The Lumark Parker combines strength-gaining architecture with energy-saving technology. Architecturally angled facets with radius corners increase the ability of the lens to deflect blows and absorb impact. Extra thick injection-molded polycarbonate lens incorporates an optical design that creates a square pattern of light. U.L. listed for wet locations and CSA certified. Mount on non-combustible surface.



## PR PARKER

70 - 175 W

High Pressure Sodium  
Metal Halide

CLEAR PRISMATIC  
POLYCARBONATE  
PARKING GARAGE  
LUMINAIRE

## ORDERING INFORMATION

SAMPLE NUMBER: HPPR-70N-120V-Q

Lamp Type	Product Family	Lamp Wattage	Ballast	Voltage <sup>3</sup>	Options & Accessories
HP=High Pressure Sodium MH=Metal Halide	PR=Parker	70=70W 100=100W 150=150W <sup>1</sup> 175=175W	N=NPF H=HPF W=HPF CWA <sup>2</sup>	120V 208V 240V 277V 347V 480V MT=Multi-Tap wired 277V <sup>4</sup> TT=Triple-Tap wired 347V <sup>4</sup>	(See Below)

### Options (add as suffix) <sup>5</sup>

Q=Quartz Restrike (Lamp by others)  
F1=Single Fuse (120, 277 or 347V)  
F2=Double Fused (208, 240 or 480V)  
QM=Quick Mount  
LL=Lamp Included <sup>6</sup>  
TR=Tamper Resistant Screws

### Accessories (order separately)

TK=Trunnion Kit  
VRSD=Tamper-Resistant Screwdriver  
VRSB=Tamper-Resistant Bit

- One-piece injection-molded UV stabilized polycarbonate lens is a minimum of 0.130" thick. All light-control prisms and blondels are on the inside surface of the lens, reducing dirt build-up and making cleaning easier
- Lens is held with four stainless steel screws. Fasteners are captive in the lens and sealed by means of a neoprene O-ring
- Die-cast aluminum with reinforcing ribs on exposed sidewalls. Thickened areas occur at lens junction and at mounting/fastening holes. Four 1/2" NPT conduit entries in sides and one in back of housing. Black polyester powder coat is standard
- One-piece die-cut closed-cell silicone mounting gasket
- Copper-wound NPF ballast standard. Ballast is available in high power factor with some lamps. Consult ordering information
- Porcelain medium-base socket with nickel-plated brass screwshell
- Approximate net weight: 20 lbs. (9 kgs.)

NOTES: 1 Uses S-55 (55 Volt lamp only). 2 Not Available in 70 & 100W Metal Halide. 3 Products also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering information. 4 Multi-Tap ballast is 120/208/240/277V wired 277V. Triple-Tap ballast is 120/277/347V wired 347V. Add desired voltage to end of catalog number. 5 Must be listed in the order shown and separated by a dash. 6 Lamp is shipped separate from luminaire. Lamp is Cooper designated product based on luminaire requirements. Specified lamps must be ordered as a separate line item.