
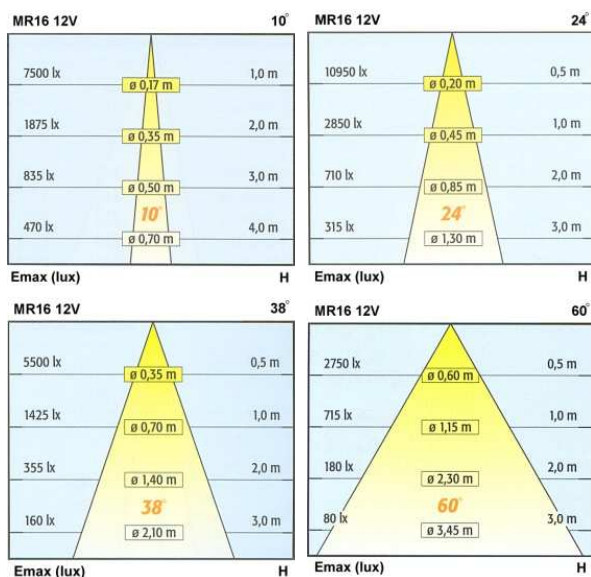


Applications

- A recessed downlight with fixed lamp position, Lumitron's LMDL-48, is specifically designed for bathroom, damp areas, dusty areas, suitable for low voltage halogen MR16. Ideal for commercial lighting applications, exhibition halls, exclusive residential projects, decorative applications, shopping arcades, hotels, condominiums, department stores, discount stores, and etc.

Specification Features

- Housing: metal body polyester powder-coated in black.
- Trim: die-cast aluminium.
- Diffuser: heat resistant, tempered glass diffuser.
- Suitable for 12V MR16 20W up to 50W.
- Polyester powder-coating in: (add suffixes to Catalog No.)
 - -W: White color
 - -B: Black color
 - -S: Silver color
- Lampholders: GX5.3, ceramic type.
- Transformer: magnetic or electronic transformer .
- Mounting: recessed mounting by supporting clips and fasteners.
- Standards: IP65 dust-tight and jet-proof.
- Conforming to DIN, VDE, IEC598-2-3, Class I Electrical.
- Diameter 85mm, cut-out 75mm.



LUMITRON REF.	Lamp	Beam Angle	Color Temp	Base
LMDL-48-20MR16	MR16 20W	10°-40°	3,000K	Gx5.3
LMDL-48-35MR16	MR16 35W	10°-40°	3,000K	Gx5.3
LMDL-48-50MR16	MR16 50W	10°-40°	3,000K	Gx5.3