



# TAPERED POLE - SIDE BRACKET

Single or twin heads, standard pole of Department of Highways, The Metropolitan Electricity Authority and The Provincial Electricity Authority for street light - side bracket.

- Round pole made of one piece hot roll sheet steel. Thickness 3.2-4.5mm, yield point less than 25Kg/mm<sup>2</sup>, tensile strength less than 41 Kg/mm<sup>2</sup> and stretched less than 21%.
- Hot-dip Galvanized, Standard ASTM A525-76
- Fuse with Service Door
- Standard BS1840/1960
- Single or twin heads 1 Pole / 4 Nuts and Screws
- Choices of pole type and bracket:
  - SB: Single bracket arm
  - DB: Double bracket arm

### Accessories

- J-Bolt 3/4 in x 200mm + Nuts + Screw, mounting 4m
- J-Bolt 1 in x 200mm + Nuts + Screw, mounting 5-9m
- J-Bolt 1 in x 300mm + Nuts + Screw, mounting 10m
- J-Bolt 1 in x 350mm + Nuts + Screw, mounting 12-14m
- Fuse

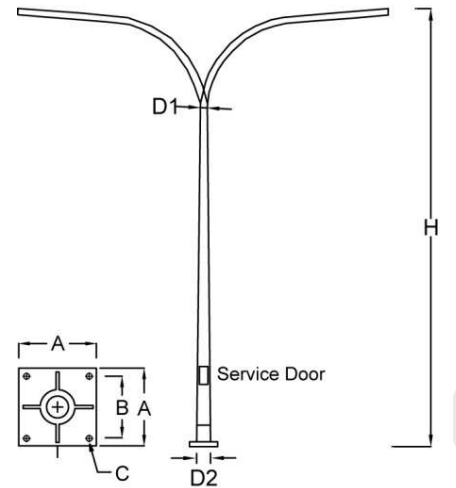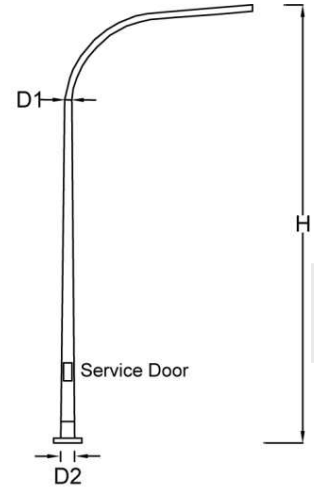

LUMITRON REF.	H (m)	D1/D2 (mm)	ARM	A	B	C	Weight (Kg)
LMRT-04.0-SB (Single)	4.0	60/100	2"x0.5M	300	200	18	42.0
LMRT-05.0-SB (Single)	5.0	60/113	2"x2.0M	350	250	25	82.0
LMRT-06.0-SB (Single)	6.0	60/127	2"x2.0M	350	250	25	94.0
LMRT-07.0-SB (Single)	7.0	60/141	2"x2.0M	350	250	25	107.0
LMRT-08.0-SB (Single)	8.0	60/156	2"x2.0M	350	250	25	122.0
LMRT-09.0-SB (Single)	9.0	60/170	2"x2.5M	380	250	25	147.0
LMRT-10.0-SB (Single)	10.0	76/190	2 1/2"x2.5M	400	300	25	172.0
LMRT-12.0-SB (Single)	12.0	76/219	2 1/2"x2.5M	450	350	25	222.0
LMRT-14.0-SB (Single)	14.0	89/260	3"x2.5M	450	350	25	305.0
LMRT-04.0-DB (Double)	4.0	60/100	2"x0.5M	300	200	18	52.0
LMRT-05.0-DB (Double)	5.0	60/113	2"x2.0M	350	250	25	92.0
LMRT-06.0-DB (Double)	6.0	60/127	2"x2.0M	350	250	25	104.0
LMRT-07.0-DB (Double)	7.0	60/141	2"x2.0M	350	250	25	117.0
LMRT-08.0-DB (Double)	8.0	60/156	2"x2.0M	350	250	25	132.0
LMRT-09.0-DB (Double)	9.0	60/170	2"x2.5M	380	250	25	157.0
LMRT-10.0-DB (Double)	10.0	76/190	2 1/2"x2.5M	400	300	25	182.0
LMRT-12.0-DB (Double)	12.0	76/219	2 1/2"x2.5M	450	350	25	232.0
LMRT-14.0-DB (Double)	14.0	89/260	3"x2.5M	450	350	25	315.0