

# LMDS - 3

## Surface Downlight




### Applications

- A range of surface-mounted downlights specially designed for high wattage compact fluorescent lamp. Applicable for low to high ceiling installations upon light source. Lumitron's LMDS-3, is ideal for commercial lighting applications, plazas, shopping arcades, hotels, restaurants, condominiums, atrium areas, under canopy, corridors, and walkways.

### Specifications

- Suitable for single or twin compact fluorescent PLC 18 and 26W
- Housing: metal housing, finish in white or black polyester powder coating.
- Diffuser: opal acrylic lens.
- Suitable for interiors use.
- Lampholders: G24d-2, G24-d3 and GX24q-3 base.
- Installations: surface mounting.
- Applicable for pendant rod-mounting.

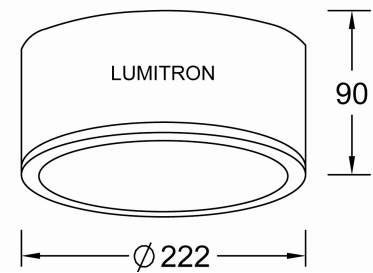

LUMITRON

LUMITRON REF.	Lamp	Lumen	Color Temp	Base
LMDS-3-18PLC	PLC 18W	1,200	2,700-4,000K	G24d
LMDS-3-26PLC	PLC 26W	1,800	2,700-4,000K	G24d
LMDS-3-218PLC	PLC 2x18W	2x1,200	2,700-4,000K	G24d
LMDS-3-226PLC	PLC 2x26W	2x1,800	2,700-4,000K	G24d
LMDS-3-32PLT	PLT 32W	2,400	2,700-4,000K	GX24q
LMDS-3-42PLT	PLT 42W	3,200	2,700-4,000K	GX24q