

LMDL - 141

Recessed Downlight




Applications

- A range of aesthetically-pleasing design, wall washer recessed downlight, vertical lamp direction. Lumitron's LLMDL-141 is suitable for PAR30 lamp 75-100W, metal halide PAR30 CDM-R lamp 35-70W to provide sufficient light output where low to medium ceiling height installation is required. Ideal for commercial lighting applications, exhibition halls, exclusive residential projects, shopping arcades, hotels, condominiums, and etc.

Specifications

- Suitable for PAR30 halogen 75W, 100W and CDM-R PAR30 35W, 70W.
- Adjustable through 0°-45°, roundly moveable 350°
- Reflector: high purity, mirror anodized aluminium chemically brighten. Available in various choices of finish. Standard offer is SM: mirror anodized reflector.
  - ☐ SM: mirror anodized aluminium reflector
  - ☐ SV: high polished vacuum anodized reflector
  - ☐ GM: Gold mirror reflector
  - ☐ GS: Gold sand-blasted reflector
- Housing: steel with black polyester powder coated for superior corrosion resistance.
- Trim: white finish.
- Lampholders: E27 base, ceramic type.
- Gearbox (for HID only, not required for incandescent and halogen lamps): remote gearbox accommodates ballast, ignitor, and P.F. correction capacitor. Lumitron offers only anti-cycling, super-posed ignitor to avoid ballast failures during ends of lamp life.
- Wiring: heat resistant, high voltage cable where applicable.
- Mounting: recessed mounting by employing supporting tools and locking devices.
- Cut-out diameter 163mm. Deep recessed version.

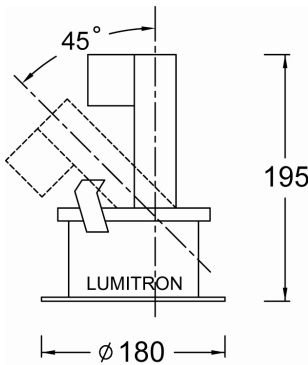

LUMITRON REF.	Lamp	Beam Angle	Base
LMDL-141-75PAR30	HAL-PAR30 75W	10°, 30°	E27
LMDL-141-100PAR30	HAL-PAR30 100W	10°, 30°	E27
LMDL-141-35CDM-R	CDM-R 35W	10°, 30°	E27
LMDL-141-70CDM-R	CDM-R 70W	10°, 40°	E27