

VERSALUX - 2

70-150W Floodlight Luminaires - IP 65 Wide / Narrow Asymmetrical



A compact discharge floodlight luminaire-wide beam symmetric or narrow asymmetrical light distribution. Lumitron's Versalux-2, is suitable for decorative interiors, industrial exteriors and commercial areas, department stores, hotels, signages, car parks, sports facilities, factories, shipping yards, loading areas, and etc.

Specifications

- Housing: corrosion resistant die cast aluminium alloy body construction completely water tight and dustproof, IP65.
- Colour: UV-stabilized polyester powder coat finish in White RAL 9003 or Black RAL 9005. Other color available on request.
 - ❑ -BK: Black Color
 - ❑ -WH: White Color
- Reflector: high purity anodized aluminium reflector chemically brighten providing wide or narrow asymmetrical distribution.
- Lens Assembly: thermal shock resistant safety glass in aluminium frame, stainless steel screws, durable silicone rubber gasket.
- Control Gear: built-in type, accommodates ballast, ignitor, capacitor and 5kV pulse lampholder VDE approved.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- Standards and Conformities: IP65 dust-tight and jet-proof. Conforming to DIN, VDE, IEC598-2-3, Class I Electrical.
- Installation/Mounting: pole mounting or wall mounting with u-shape bracket. Cable gland PG 13.5 for cable entry of 7.5–13.5mm o/d cable connection.

Accessories (add suffixes to Catalog No.)

- ❑ -VL-VSL2: Vertical louver
- ❑ -HL-VSL2: Horizontal louver
- ❑ -GS-VSL2: Glare shield / barn door
- ❑ -CF: Colour filters: Blue, Red, Yellow, and Green

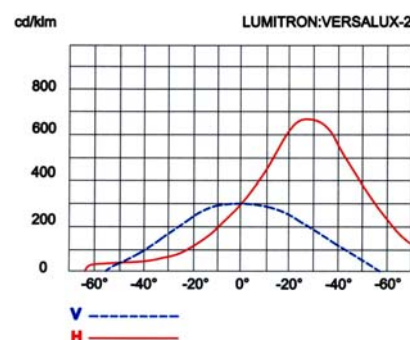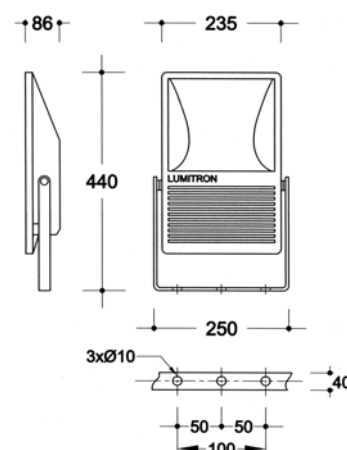

Ordering Information

Lumitron Ref.	Lamp Type	Lumens	CCT. (K)	Base	Remark
VSL-2-150HAL-DE	HAL-DE 150W	2,600	3,000	R7s	Recheck lumen with lamp catalog.
VSL-2-300HAL-DE	HAL-DE 300W	5,000	3,000	R7s	
VSL-2-500HAL-DE	HAL-DE 500W	9,500	3,000	R7s	❑ -WA: Wide Asymmetrical ❑ -NA: Narrow Asymmetrical
VSL-2-70HPS-DE	HPS-DE 70W	6,800	2,000	RX7s	
VSL-2-150HPS-DE	HPS-DE 150W	15,000	2,000	RX7s	
VSL-2-70MH-DE	MH-DE 70W	5,500	3,000-5,200	RX7s	
VSL-2-150MH-DE	MH-DE 150W	11,250	3,000-5,200	RX7s	