

Architectural bollards luminaries with low glare at normal viewing angles. It expresses safety, strength and harmony in urban amenity lighting applications. Lumitron's LMBL-60, 61, is suitable for gardens, parks, public spaces, residential areas, building perimeters, etc.


Specifications

- Housing: corrosion resistant die cast aluminium body on extruded aluminium post.
- UV-stabilized polyester powder coating finish in Black RAL 9005. Other color available on request.
- Reflector: anodized aluminium reflector.


- Diffuser: UV-stabilized, opal acrylic.
- Non-aging silicone rubber gasket.
- Stainless steel screws
- Built-in control gear.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- Vandal resistant construction.
- Dust-proof and jet-proof IP55
- Conforming to DIN, VDE, IEC Class I Electrical.



LMBL-60

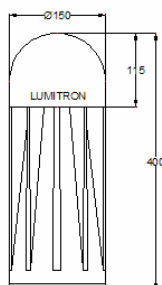

LMBL-61

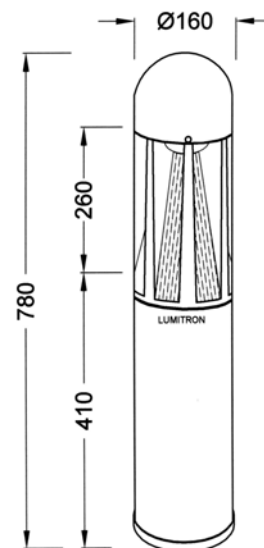

Ordering Information

Lumitron Ref.	Lamp Type	Lumens	Color Temp (K)	Base	Remark
LMBL-60 LMBL-61	PLE 20W	1,200	2,700-4,000	E27	Recheck lumen with lamp catalog.
	PLC 18W	1,200	2,700-4,000	G24d-2	
	MV 80W	4,000	4,000	E27	
	HPS 70W	5,600	2,000	E27	
	MH 70W	5,300	3,200-4,000	E27	