

## SIGN LITER

### 150-400W Signage Floodlight Luminaire - IP 54

A discharge floodlight luminaire, specially designed for signage lighting applications. Lumitron's Sign Liter provides rectangular distribution to evenly illuminate the sign panels or other vertical surfaces. Thanks to its superior lighting performance as well its durability and functionalities. Ideal for advertising signs, building facades, and industrial exteriors.


#### Specifications

- Housing: rugged, corrosion resistant die cast aluminium alloy body construction completely dust-proof and splash proof IP54
- Colour: UV-stabilized polyester powder coat finish in Grey.
- Refractor: heat resistant, prismatic borosilicate glass lens to provide rectangular beam pattern either wide beam or narrow beam spread. Allowing optimized uniform light output on the vertical sign surfaces up on the lighting design criterions. Each luminaire is able to illuminate vertical sign area of 20-26m<sup>2</sup>.
- Reflector: anodized aluminium reflector chemically brighten.
- Lens Assembly: die cast aluminium front frame is sealed with the body by stainless steel screws and durable silicone rubber gasket.
- Control Gear: built-in type, accommodates ballast, ignitor, capacitor and ceramic lampholders.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- High voltage, heat resistant wiring cable where applicable.
- Standards and Conformities: IP54 dust-proof and splash-proof conforming to DIN, VDE, IEC598-2-3-1993, Class I Electrical
- Installation / Mounting: pipe mounting. Optional adjustable fitter available on request.




#### HS

Narrow Beam, Sign Liter with adjustable fitter for pipe mounting

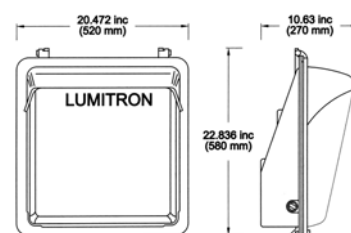

#### SS

Extra wide beam for low height sign board

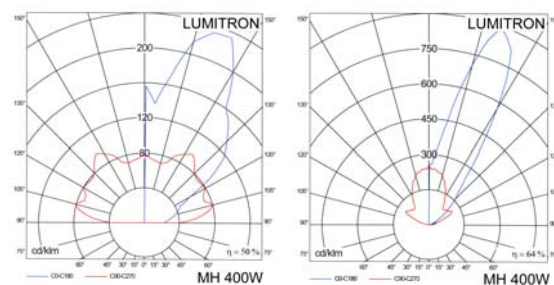

SL-400MH-T Extra Wide Beam SL-400MH-T Narrow Beam

#### Ordering Information

Lumitron Ref.	Lamp Type	Lumen	CCT. (K)	Base	Remark
SL-250MV	MV 250W	13,000	4,000	E40	Recheck lumen with lamp catalog.
SL-400MV	MV 400W	22,000	4,000	E40	
SL-150HPS	HPS 150W	14,000	2,000	E40	
SL-250HPS	HPS 250W	27,000	2,000	E40	
SL-400HPS	HPS 400W	48,000	2,000	E40	
SL-250MH	MH 250W	20,000	3,200-5,300	E40	
SL-400MH-T	MH-T 400W	36,000	4,000-5,200	E40	
SL-400SMH-E	Super MH-E 400W	44,000	3,700-4,000	E40	
SL-400MH-DL	MH 400W	32,000	6,000	E40	