


Wall Light

A range of durable architectural wall luminaires suitable for walls, corridors, building facades, walkways, especially ramps for building's car park areas. Provide low glare lighting as the light is downwardly controlled for maximum illumination to the walkway or driveway. Lumitron's LMWL-53, is designed to efficiently utilize compact fluorescent lamp.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in Black RAL 9005. Other color available on request.
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: temperature shock, heat resistant, safety tempered glass lens.
- Stainless steel screws and silicone rubber gasket.
- Built-in control gear.
- Lampholder G24d-1, G24d-2, G24d-3 VDE approved.
- IP 65 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.
- Installation/Mounting: wall mounted by plastic recessed box.

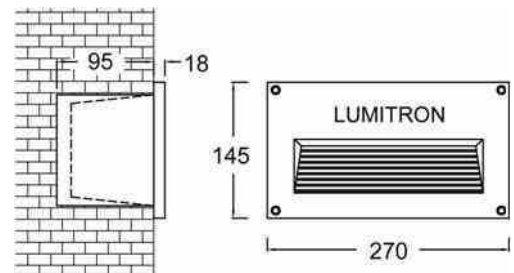

LUMITRON REF.	Lamp	Lumen	Base
LMWL-53-10/13PLC	PLC 10/13W	600/900	G24d
LMWL-53-18PLC	PLC 18W	1,200	G24d
LMWL-53-26PLC	PLC 26W	1,800	G24d