


LMWL - 54

Architectural Recessed Wall Light - IP 55

A range of durable architectural wall luminaires suitable for walls, corridors, building facades, walkways, especially ramps for building's car park areas. Provide low glare lighting as the light is downwardly controlled for maximum illumination to the walkway or driveway. Lumitron's LMWL-54, is designed to efficiently utilize compact fluorescent lamp.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in standard color. Other color available on request.
 - SV: Silver RAL9006
 - WH: White RAL9003
 - BK: Black RAL9005
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: temperature shock, heat resistant, safety tempered glass lens.
- Stainless steel screws and silicone rubber gasket.
- Built-in control gear.
- Lampholder G24d-1, G24d-2 VDE approved.
- IP 55 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.
- Installation/Mounting: wall mounted by recessed box.

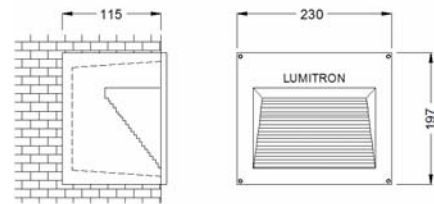

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-54-10PLC	PLC 10W	600	2,700-4,000K	G24d-1	Recheck lumen with lamp catalog.
LMWL-54-13PLC	PLC 13W	900	2,700-4,000K	G24d-1	
LMWL-54-18PLC	PLC 18W	1,200	2,700-4,000K	G24d-2	
LMWL-54-LED	LED	-	Red,Green,Blue,White		