


LMWL - 55

Architectural Recessed Wall Light - IP 55

A range of durable architectural wall luminaires suitable for walls, corridors, building facades, walkways, especially ramps for building's car park areas. Provide low glare lighting as the light is downwardly controlled for maximum illumination to the walkway or driveway. Lumitron's LMWL-55, is designed to efficiently utilize compact fluorescent and HID lamp.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in standard color. Other color available on request.
 - ☐ -SV: Silver RAL9006
 - ☐ -WH: White RAL9003
 - ☐ -BK: Black RAL9005
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: temperature shock, heat resistant, safety tempered glass lens.
- Stainless steel screws and silicone rubber gasket.
- Built-in control gear.
- Lampholder 2G10, E27, RX7s VDE approved.
- IP 55 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.
- Installation/Mounting: wall mounted by plastic recessed box.

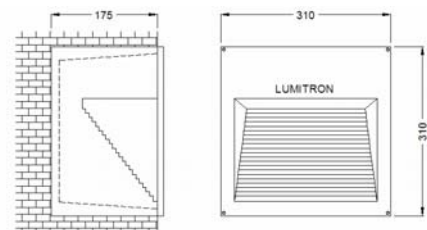

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-55-36PLF	PL-F 36W	2,800	4,000K	2G10	Recheck lumen with lamp catalog.
LMWL-55-80MV	MV 80W	3,800	3,800K	E27	
LMWL-55-70HPS-DE	HPS-DE 70W	6,800	2,000K	RX7s	
LMWL-55-70MH-DE	MH-DE 70W	5,500	3,000-4,200K	RX7s	