



LMWL - 56

Architectural Recessed Wall Light - IP 55

A range of durable architectural mini wall luminaires, Lumitron's LMWL-56, is suitable for walls, corridors, building facades, walkways, especially ramps for building's car park areas. Provide low glare lighting as the light is downwardly controlled for maximum illumination to the walkway or driveway.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in standard color. Other color available on request.
 - SV: Silver RAL9006
 - WH: White RAL9003
 - BK: Black RAL9005
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: temperature shock, heat resistant, safety tempered glass lens.
- Vandal resistant construction.
- Stainless steel screws and silicone rubber gasket.
- Built-in control gear.
- Control Gear: built-in type
- Lampholder G4, G9 VDE approved.
- IP 55 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.
- Installation/Mounting: wall mounted by recessed box.

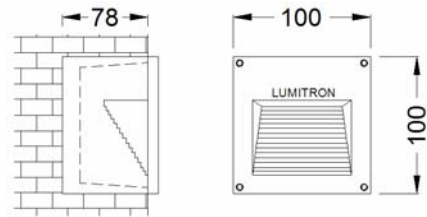

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-56-20JC	JC 20W 12V	320	3,000	G4	Recheck lumen with lamp catalog.
LMWL-56-25JCD	JCD 25W 220V	260	2,900	G9	
LMWL-56-12LED	12 LED 12VDC 1.5W	-	Red,Green,Blue,White		