

LMPT - 53

Post Light

An architecture of decorative post light, Lumitron's LMPT-53 luminaire, is designed to achieve superior lighting functionality whilst providing attractive styling and desirable theme, especially for prestigious projects. Ideal for landscape applications such as, exhibition halls, department stores, gardens, parks, hotels, residential areas, precincts, walkways, and other amenity areas.

Specifications


- Housing: corrosion resistant die cast aluminium alloy.
- UV stabilized polyester powder coat finish in White, Black, Silver.
- Reflector: anodized aluminium perforate-ring. Provide adjustable up-down sliding for adjustable beam pattern.
- Diffuser: UV-Stabilized polycarbonate. Choices of diffuser:
 - ❑ OP: opal diffuser.
 - ❑ CL: clear diffuser with aluminium louver.
- Stainless steel screws and silicone rubber gasket.
- Control Gear: built-in type, accommodates ballast, ignitor, lampholders VDE approved, and P.F. correction capacitors.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- Protection level IP55 dust-proof and jet-proof.
- Conforming to DIN, VDE, IEC Class I Electrical.



LMPT-53A



LMPT-53B

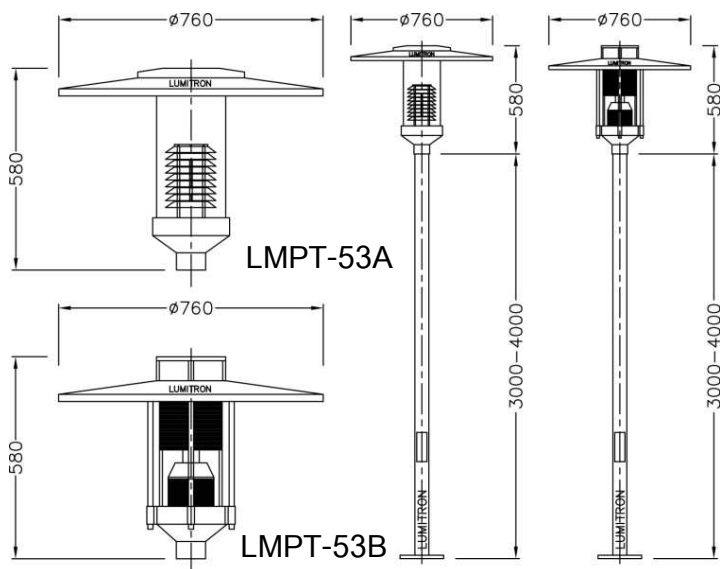

LUMITRON REF.	หลอด	สูงเมน	ขั้ว
	MV 80W	3,800	E27
	MV 125W	6,300	E27
LMPT-53A (Type A)	HPS 70W	5,600	E27
LMPT-53B (Type B)	HPS 150W	14,000	E40
	MH 70W	5,300	E27
	MH 150W	14,250	E27