


## LMWL - 4

### Wall Surface Mounted Down Light - IP 65

Architectural wall luminaries, Lumitron's LMWL-4, is specifically designed for decorative amenity applications such as public areas, commercial and residential areas. Applicable for various types of light source, including compact fluorescent lamps for energy saving applications. Ideal for terraces, corridors, walkways, columns, trees, entrances, and facades.

#### Specifications

- Corrosion resistant, die cast aluminium body.
- Colour: UV resistant polyester powder coat finish in White RAL 9010, Black RAL 9005, or silver aluminium color.
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: heat-resistant, safety tempered glass lens.
- Stainless steel screws.
- Durable silicone rubber gasket.
- Lampholder: VDE approved E27, GX5.3, GU10.
- Built-in control gear.
- IP 65 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.

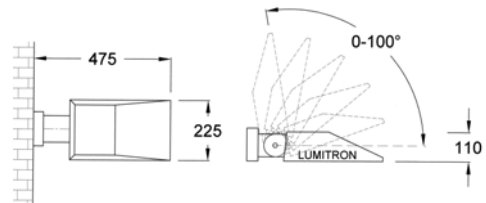

#### Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-4-70HPS-DE	HPS-DE 70W	5,600	2,000K	RX7s	Recheck lumen with lamp catalog.
LMWL-4-150HPS-DE	HPS-DE 150W	15,000	2,000K	RX7s	
LMWL-4-70MH-DE	MH-DE 70W	5,200	3,000-4,200K	RX7s	
LMWL-4-150MH-DE	MH-DE 150W	11,250	3,000-4,200K	RX7s	