



LMWL - 3

Wall Surface Mounted Down Light - IP 55


Architectural wall luminaries, Lumitron's LMWL-3, is specifically designed for decorative amenity applications such as public areas, commercial and residential areas. Applicable for various types of light source, including compact fluorescent lamps for energy saving applications. Ideal for terraces, corridors, walkways, columns, trees, entrances, and facades.

Specifications

- Corrosion resistant, die cast aluminium body.
- Colour: UV resistant polyester powder coat finish in White RAL 9010, Black RAL 9005, or silver aluminium color.
- Reflector: high purity, anodized aluminium reflector with choices of beam pattern:
 - WS: wide symmetrical beam.
 - WA: wide asymmetrical beam.
- Diffuser: heat-resistant, safety tempered glass lens.
- Stainless steel screws.
- Durable silicone rubber gasket.
- Lampholder: VDE approved G24d-2, GX24q-3 / 4, E27, RX7s, G12
- Built-in control gear.
- Standards: IP55 dust-proof and jet-proof.
- Conforming to DIN, VDE, IEC598-2-3, Class I Electrical.

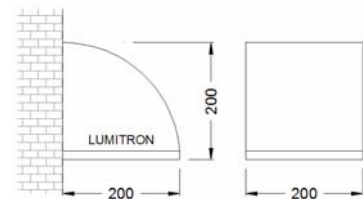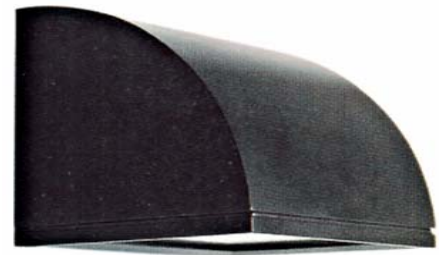

LMWL-3S 10-80W

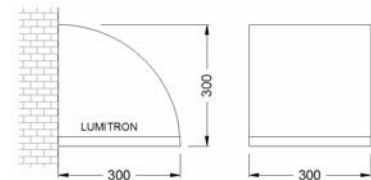

LMWL-3L 10-150W

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-3S LMWL-3L	PLC 13W / 18W	900 / 1,200	2,700-4,000K	G24d-2	Recheck lumen with lamp catalog.
	PLT 26W	1,800	2,700-4,000K	GX24q-3	
	MV 80W	3,800	4,000K	E27	
	HPS 70W	5,600	2,000K	E27/RX7s	
	MH 35W	3,300	3,200-4,000K	G12	
LMWL-3L	MH 70W	5,300	3,200-4,000K	G12/E27/RX7s	
	PLT 32W / 42W	2,400 / 3,200	2,700-4,000K	GX24q-3 / 4	
	MV 125W	6,300	2,700-4,000K	E27	
	MH 150W	14,000	3,200-4,000K	G12	
	HPS 100W	10,000	2,000K	E27	