


U-Shape Wrap Around Diffuser

Applications

- Diverse applications of commercial and industrial lighting i.e. homes, schools, offices, stores, warehouses, car parks, etc.
- Suitable for indoor applications requiring low luminance from all direction.

Specifications

- Heavy-duty housing, die-formed from code-gauge cold-rolled steel housing.
- Housing thickness available.
 - T4: 0.4 mm. T6: 0.6 mm. T8: 0.8 mm
- Rotary-locked lampholder and starter holder (standard offer).
- Optional Feature: Spring-loaded lampholder with rotary-locked starter holder are incorporated to the fittings, which allow relamping from either end with reliable quality.
- Optional stainless steel construction available.
- Maintained emergency version available, provided with high quality conversion kits manufactured according to CEI 34-50, EN 60924 c/w high ambient temperature Ni-Cd battery, charger, and high frequency inverter. Standard backup duration 2-3 hours, 1 hour version please consult Lumitron.
- Standard offer is standard loss magnetic ballast with glow-start type starter. Lumitron can offer wide selections of control gears suitable for each specific applications and budget requirements i.e. HF electronic ballast, electronic starter, low loss magnetic ballast.
- Finish - Multi-stage (six) iron-phosphate pretreatment to ensure superior paint adhesion and maximum corrosion resistance. High reflectance finished with glossy, baked white enamel (polyester) powder giving a smooth resilient finish.
- Wiring – Standard version provided with 70°C, THW 1.0 sqmm cable. Special cable types of 1.5 sqmm 70°C, 105°C or LSFH (Low Smoke Free Halogen) are optional, and shall be specified when ordering.
- Installation – Surface or suspended mounting.
- Select Diffuser – add suffix:
 - PA: Prismatic acrylic diffuser
 - OP: Opal acrylic diffuser
 - CL: Clear acrylic diffuser
 - ST: Stipple acrylic diffuser

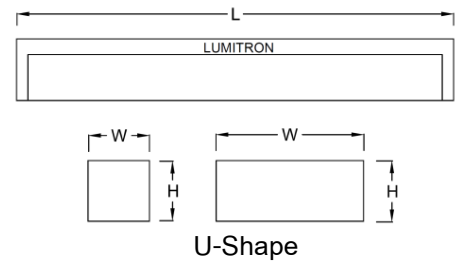

LUMITRON REF.	Lamp	L	W1	W2	H1	H2
LU-PA	1x18W	610	50	55	40	90
LU-OP	2x18W	610	50	120	40	90
LU-ST	1x36W	1,220	50	55	40	90
LU-CL	2x36W	1,220	50	120	40	90