

PL-C

PL-C 4P



PL-C 10W



PL-C 13W




PL-C 18W



PL-C 26W

Dimensions in mm

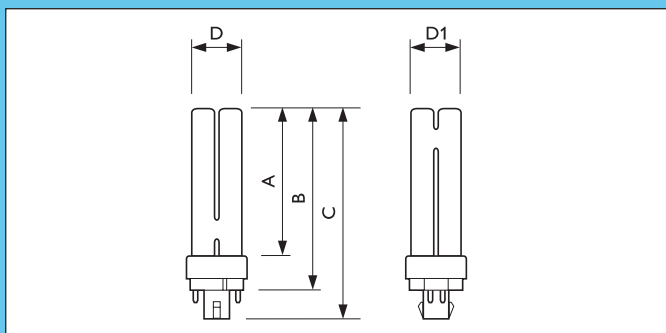

Product Description

- Energy-saving compact fluorescent lamps
- Compact long-arc low-pressure mercury discharge lamp
- Envelope consists of 4 parallel narrow fluorescent tubes

Product Features

- 2-pin base with a housing incorporating the special instant starter and capacitor. For use on conventional copper iron ballasts and the radio interference suppression capacitor is installed. Dimming is not possible
- 4-pin base without starter and capacitor; for use with high frequency electronic ballast or with electromagnetic ballast and a starter. Dimming is possible with the appropriate ballast
- Lamp characteristics are influenced by operating conditions and control gear used

Application

- Optimal light performance for short or long operation per switch on
- Long life and sustainable light output
- Designed for general or supplementary lighting in professional or home environments Recessed or surface-mounted downlighters, wall units, table lamps and pendant lamps


	Base face to base face	Insertion length	Overall length	Diameter	Diameter
Product ID	A max.	B max.	C max.	D max.	D1 max.
10W	75.7	95	109.9	27.1	27.1
13W	97.5	117	131.9	27.1	27.1
18W	109.5	129	143.9	27.1	27.1
26W	130.7	150	164.9	27.1	27.1

Preferred selection


Product ID	Rated Lamp Wattage [W]	Cap Base	Cap Base Information	Color Temperature [K]	Color Rendering Index [Ra]	Luminous Flux Lamp EM/CuFe [lm]	Life to 50% Failures EM [hrs]	Lumen Maintenance 5000h [%]
MASTER PL-C 10W/827/4P 1CT	10	G24q-1	4P	2700	82	600	10000	84
MASTER PL-C 10W/830/4P 1CT	10	G24q-1	4P	3000	83	600	10000	84
MASTER PL-C 10W/840/4P 1CT	10	G24q-1	4P	4000	82	600	10000	84
MASTER PL-C 13W/827/4P 1CT	13	G24q-1	4P	2700	83	900	10000	84
MASTER PL-C 13W/830/4P 1CT	13	G24q-1	4P	3000	83	900	10000	84
MASTER PL-C 13W/840/4P 1CT	13	G24q-1	4P	4000	82	900	10000	84
MASTER PL-C 18W/827/4P 1CT	18	G24q-2	4P	2700	83	1200	10000	87
MASTER PL-C 18W/830/4P 1CT	18	G24q-2	4P	3000	83	1200	10000	87
MASTER PL-C 18W/840/4P 1CT	18	G24q-2	4P	4000	82	1200	10000	87
MASTER PL-C 26W/827/4P 1CT	26	G24q-3	4P	2700	83	1800	10000	87
MASTER PL-C 26W/830/4P 1CT	26	G24q-3	4P	3000	83	1800	10000	87
MASTER PL-C 26W/840/4P 1CT	26	G24q-3	4P	4000	82	1800	10000	87

Spectral power distribution

PL-C /827/4P

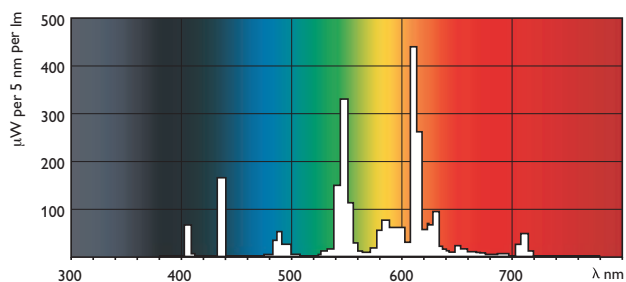

PL-C /830/4P

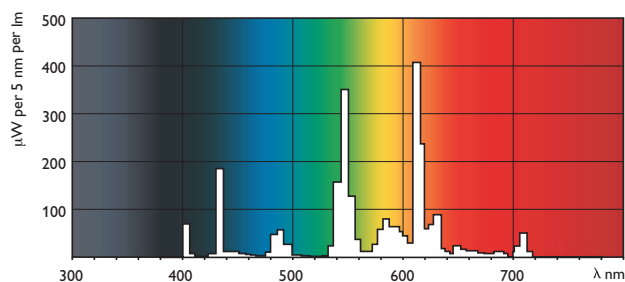

PL-C /840/4P

