

PL-S



PL-S 11W



PL-S 9W

Product Description

- Energy-saving compact fluorescent lamps
- Compact long-arc low-pressure mercury discharge lamp
- Envelope consists of 2 parallel narrow fluorescent tubes

Product Feature

- 4-pin base without starter and capacitor. Suitable for use with electronic gear, enabling dimmable light output, HF operation
- Lamp characteristics are influenced by operating conditions and control gear used


Product Benefit

- Optimal light performance for short or long operation per switch on
- Long life and sustainable light output

Application

- Designed for use in hotels, restaurants, theatres and homes
- Suitable for use in signs, corridors, security and orientation lighting

Dimensions in mm

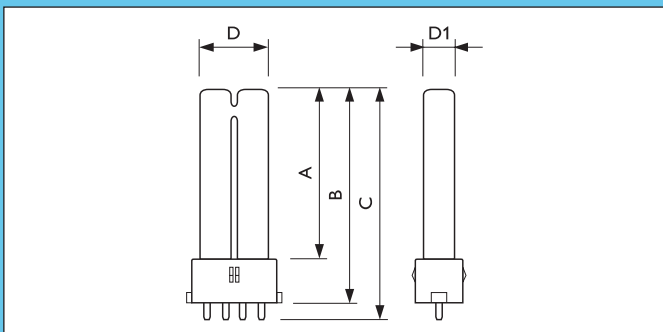


	Base face to base face	Insertion length	Overall length	Diameter	Diameter
Product ID	A max.	B max.	C max.	D max.	D1 max.
7W	96	113	119.1	27.1	10
9W	128	145	151.1	27.1	10
11W	196	214	219.9	27.1	10

Preferred selection

Product ID	Rated Lamp Wattage [W]	Cap Base	Cap Base Information	Color Temperature [K]	Color Rendering Index [Ra]	Luminous Flux Lamp EM/CuFe [lm]	Lumen Maintenance 2000h [%]	Life to 50% Failures [hrs]	Nett Weight Product in Grams [gr]
PL-S 7W/827/4P 1CT	7	2G7	4P	2700	83	400	90	8000	30
PL-S 7W/840/4P 1CT	7	2G7	4P	4000	82	400	90	8000	30
PL-S 7W/865/4P 1CT	7	2G7	4P	6500	79	400	85	8000	30
PL-S 9W/827/4P 1CT	9	2G7	4P	2700	83	600	90	8000	30
PL-S 9W/840/4P 1CT	9	2G7	4P	4000	82	600	90	8000	30
PL-S 11W/840/4P 1CT	11	2G7	4P	4000	82	900	95	8000	40
PL-S 11W/865/4P 1CT	11	2G7	4P	6500	79	900	90	8000	40

Spectral power distribution

PL-S /827/4PLM

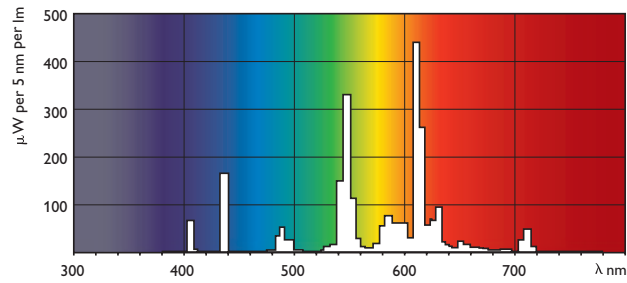

PL-S /840/4PLM

