

PL-T

PL-T TOP 4P



PL-T 42W

Product Description

- Energy saving compact fluorescent lamp
- Compact long-arc low-pressure mercury discharge lamp
- Envelope consists of 6 parallel narrow fluorescent tubes
- Amalgam controlled operation

Product Feature

- 4-pin base without glow switch starter and capacitor
- Hot restrike - moderate light run up after cooling down at low temperatures
- Optimized lighting performance over a broad temperature range due to Philips amalgam technology
- Dimming is possible


Product Benefit

- Optimal light performance for long operation per switch on
- Substantial more light (about 30% more) per light point than common
- High temperature independency at higher application temperatures
- Long life and sustainable light output

Application

- Designed for general or supplementary lighting in professional and semi-professional environments
- Ideal for use in recessed or surface mounted downlighters, wall units
- First choice for long switching cycles and highest light output

Dimensions in mm

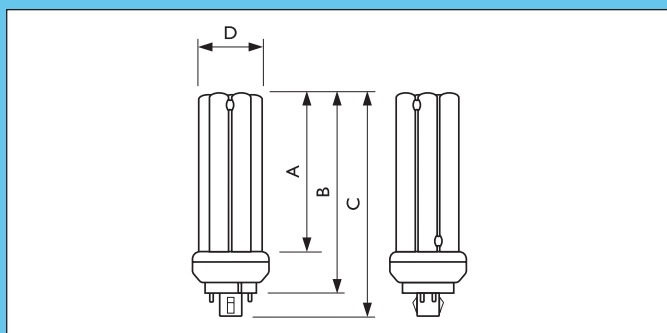

Product ID	Base face to base face	Insertion length	Overall length	Width
	A max.	B max.	C max.	D max.
18W	71.7	96.0	111.7	41
26W	86.7	111.0	126.7	41
32W	98.7	123.0	138.7	41
42W	120.7	145.0	160.7	41
57W	157.7	182.0	197.7	41


Preferred selection

Product ID	Rated Lamp Wattage [W]	Cap Base	Cap Base Information	Color Temperature [K]	Color Rendering Index [Ra]
MASTER PL-T TOP 18W/830/4P 1CT	18	GX24q-2	4P	3000	82
MASTER PL-T TOP 18W/840/4P 1CT	18	GX24q-2	4P	4000	82
MASTER PL-T TOP 26W/830/4P 1CT	26	GX24q-3	4P	3000	82
MASTER PL-T TOP 26W/840/4P 1CT	26	GX24q-3	4P	4000	82
MASTER PL-T TOP 32W/827/4P 1CT	32	GX24q-3	4P	2700	82
MASTER PL-T TOP 32W/830/4P 1CT	32	GX24q-3	4P	3000	82
MASTER PL-T TOP 32W/840/4P 1CT	32	GX24q-3	4P	4000	82
MASTER PL-T TOP 42W/827/4P 1CT	42	GX24q-4	4P	2700	82
MASTER PL-T TOP 42W/830/4P 1CT	42	GX24q-4	4P	3000	82
MASTER PL-T TOP 42W/840/4P 1CT	42	GX24q-4	4P	4000	82
MASTER PL-T TOP 57W/827/4P 1CT	57	GX24q-5	4P	2700	82
MASTER PL-T TOP 57W/830/4P 1CT	57	GX24q-5	4P	3000	82
MASTER PL-T TOP 57W/840/4P 1CT	57	GX24q-5	4P	4000	82


Product ID	Luminous Flux Lamp EL [lm]	Life to 50% Failures Preheat EL [hrs]	Life to 50% Failures Non-preheat EL [hrs]	Nett Weight Product in Grams [gr]
MASTER PL-T TOP 18W/830/4P 1CT	1200	13000	7000	58
MASTER PL-T TOP 18W/840/4P 1CT	1200	13000	7000	58
MASTER PL-T TOP 26W/830/4P 1CT	1800	13000	7000	64
MASTER PL-T TOP 26W/840/4P 1CT	1800	13000	7000	64
MASTER PL-T TOP 32W/827/4P 1CT	2400	13000	7000	70
MASTER PL-T TOP 32W/830/4P 1CT	2400	13000	7000	70
MASTER PL-T TOP 32W/840/4P 1CT	2400	13000	7000	70
MASTER PL-T TOP 42W/827/4P 1CT	3200	13000	7000	83
MASTER PL-T TOP 42W/830/4P 1CT	3200	13000	7000	83
MASTER PL-T TOP 42W/840/4P 1CT	3200	13000	7000	83
MASTER PL-T TOP 57W/827/4P 1CT	4300	13000	7000	101
MASTER PL-T TOP 57W/830/4P 1CT	4300	13000	7000	101
MASTER PL-T TOP 57W/840/4P 1CT	4300	13000	7000	101

Spectral power distribution

PL-TTOP /827/4P

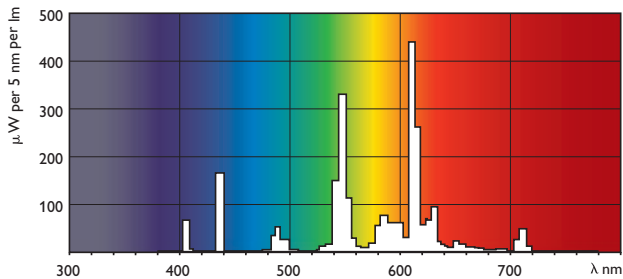

PL-TTOP /830/4P

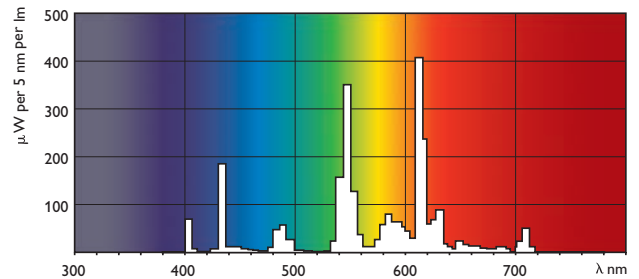

PL-TTOP /840/4P

