

GLS Specialties




RC B22 A60 FR



RC E27 A65 CL

Dimensions in mm

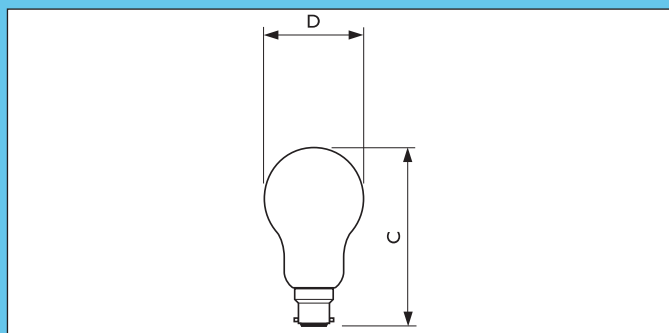

Practitone Reinforced Construction

Product Description

- Reinforced construction lamp with exceptionally strong filament to withstand mechanical shocks and vibrations

Product Feature

- Specification otherwise as for standard incandescent lamps
- Universal burning position

Product Benefit

- Longer life when used in heavy duty applications as compared to standard incandescent lamps

Application

- Hand-held inspection lights
- Task lights in maintenance and automotive service shops

Product ID	Overall length	Diameter
	C max.	D max.
60W B22	105.5	60
100W B22	116.0	65
100W E27	117.5	65

Preferred selection

Product ID	Rated Lamp Wattage [W]	Cap Base	Voltage [V]	Bulb	Bulb Finish	Luminous Flux Lamp [lm]	Average Life Time [hrs]	Nett Weight Product In Grams [gr]
Reinforced Construction 60W B22 230V A60 FR 1CT	60	B22	230	A60	Frosted	515	2000	34
Reinforced Construction 100W B22 230V A65 FR 1CT	100	B22	230	A65	Frosted	990	2000	39
Reinforced Construction 100W E27 230V A65 CL 1CT	100	E27	230	A65	Clear	990	2000	35.5