



LED Ribbon

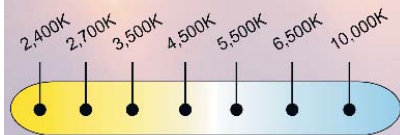

- ENERGY SAVING
- Dimmable (0% to 100%)
- Operation: -20°C to +50°C
- 5 VDC, 12 VDC, 24 VDC
- 120° beam angle
- Constant Voltage
- IP20 (Bare, 2mm, 10mm)
- IP65 (Silicon, 3mm, 10mm)
- IP66 (Silicon Tube Silicon, 6mm, 12mm)
- IP67 (Silicon Tube Empty, 4mm, 12mm)
- IP68 (Silicon Tube Silicone, 4mm, 12mm)
- INDOOR / OUTDOOR

- RGB: Color Changer (Input voltage: 12VDC)
- DMX512: Control by DMX512 system

ITSL-3

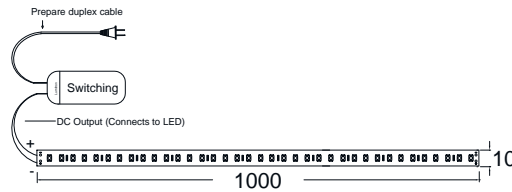

ITSL-4



REF.	LED Qty / M	Watt / M	Lumen / M	Voltage	IP20	IP65	IP66	IP67	IP68
ITSL-3-30L	30 LED	2.4W	60-180	12VDC	✓	✓	✓	✓	✓
ITSL-3-60L	60 LED	4.8W	120-360	12VDC	✓	✓	✓	✓	✓
ITSL-3-78L	78 LED	6.2W	156-468	12VDC	✓	✓	✓	✓	✓
ITSL-3-120L	120 LED	9.6W	240-720	12VDC	✓	✓	✓	✓	✓
ITSL-3-180L	180 LED	14.4W	720	12VDC	✓	✓	✓	✓	✓
ITSL-3-240L	240 LED	19.2W	720-1,440	24VDC	✓	N/A	N/A	N/A	N/A
ITSL-4-30L	30 LED	7.2W	180-480	12VDC	✓	✓	✓	✓	✓
ITSL-4-32L	32 LED	7.7W	192-512	5VDC	✓	N/A	N/A	✓	N/A
ITSL-4-48L	48 LED	11.5W	288-768	12VDC	✓	✓	✓	✓	✓
ITSL-4-60L	60 LED	14.4W	360-960	12VDC	✓	✓	✓	✓	✓
ITSL-4-72L	72 LED	17.3W	432-1,250	12VDC	✓	✓	N/A	N/A	N/A
ITSL-4-120L	120 LED	28.8W	720-1,920	24VDC	✓	✓	✓	N/A	N/A

LED

LUMITRON